


Rod-Reinforced Chain Link

Request for Further Information / Quotation


Please supply the following dimensions, where applicable:

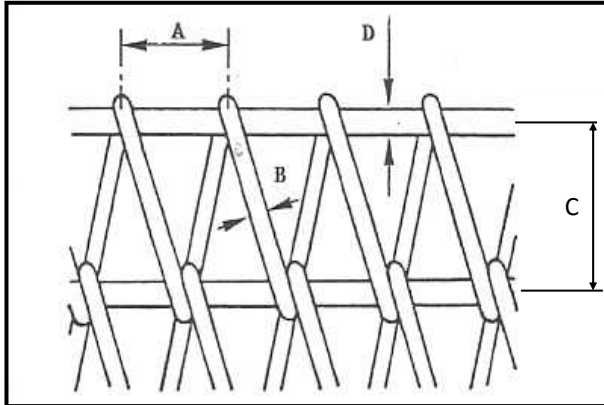

***NOTE: When measuring pitches A & C, it is best practice to measure over 10 pitches and then divide by 10 to obtain the average pitch.**




CLR-W-IN/OUT




CLR-W-IN LINE



CLR-W-BENT PIN

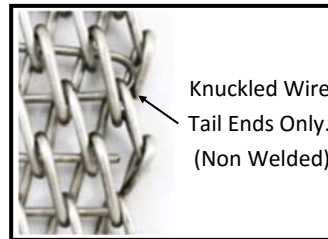

CLR-K/U

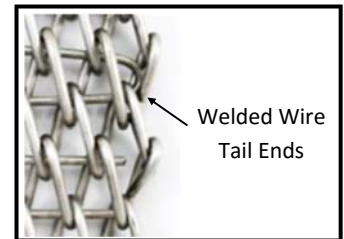

CLR-K/U/W

Material:	Overall Width:	mm	Length:	metres
------------------	-----------------------	----	----------------	--------

A	Lateral Coil Pitch*	mm
B	Wire Diameter	mm
C	Longitudinal Cross Wire Pitch*	mm
D	Wire Diameter	mm

If the belt edge is other than listed please forward sketch or picture. If fitted with Side Chains, please also complete our Chain Edge Drive enquiry sheet.

Edge Type	
Welded (CLR-W-IN/OUT)	
Welded (CLR-W-IN LINE)	
Welded (CLR-W-BENT PIN)	
Knuckled (CLR-K/U)	
Welded (CLR-K/U/W)	

Further Information: